

SMARTHINGE Secondary Glazing



SMARTHINGE <u>frame</u> sizes:Minimum: 300mm Wide x 300 High.Maximum: 1,000mm Wide x 2,000mm High.


- Suitable for 4mm and 6mm glazing panels.
- Glazing material: Plate Polycarbonate.
- SMARTHINGE supplied with fixings (No.6 x 25mm, Stainless Screws). and Toggle (to close Frame).
- Hinged on Left or Right.
- Simple steps to install.
- Neat and unobtrusive.
- Easy to remove for maintenance/cleaning.
- Face-Fix only.
- Frame Depth: 32mm(inc. Toggle).
- Check Operating Margin (see over).

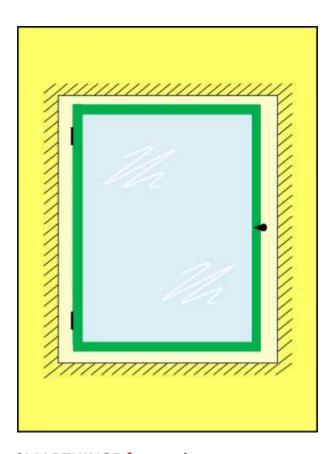

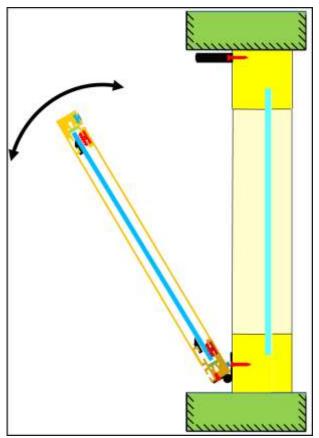

Copyright Omega (Roofing) Plastics Ltd 2015

Omega (Roofing) Plastics Ltd, West Ley, Alswear Old Road, South Molton, Devon. <u>www.omegabuild.com</u>, 01769 574426.

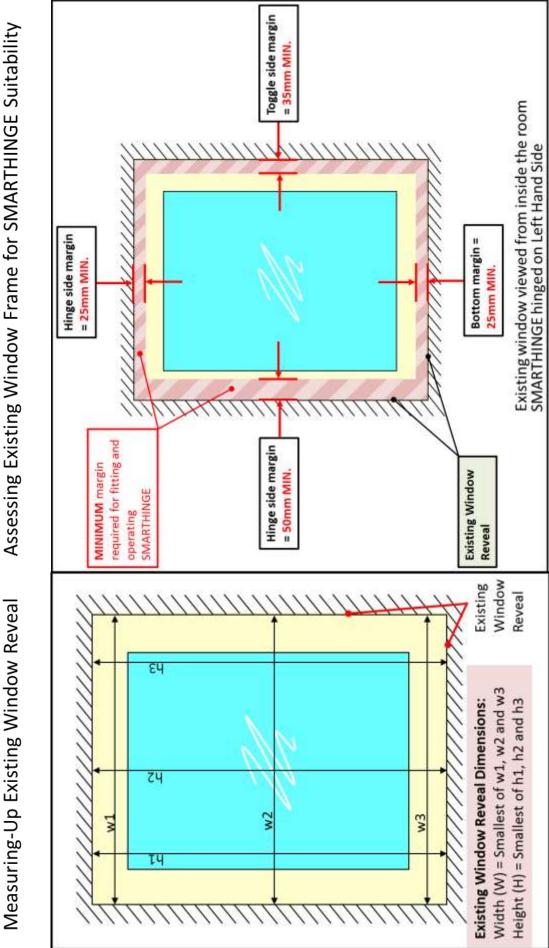

Assessing Existing Window Frame for SMARTHINGE Suitability

Copyright Omega (Roofing) Plastics Ltd 2015

Omega (Roofing) Plastics Ltd, West Ley, Alswear Old Road, South Molton, Devon. www.omegabuild.com, 01769 574426.